


Dimensions – Goupilles Spirales PRYM-Inovan*

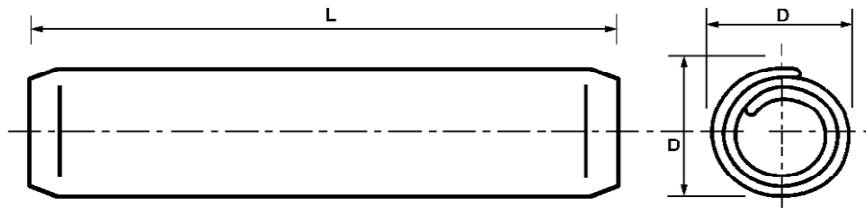

Diamètres nominaux		0.8	1	1.2	1.5	2	2.5	3	3.5	4	5	6	8	10	12	14	16
Matériaux Disponibles		Acier Inoxydable, 304				Acier au Carbone, Acier Inoxydable, 304										Acier au Carbone	
Diamètre Expandé 'D'																	
Résistance standard	Max	0.91	1.15	1.35	1.73	2.25	2.78	3.30	3.84	4.40	5.50	6.50	8.63	10.80	12.85	14.45	16.45
	Min	0.85	1.05	1.25	1.62	2.13	2.65	3.15	3.67	4.20	5.25	6.25	8.30	10.35	12.40	14.95	17.00
Haute résistance	Max				1.71	2.21	2.73	3.25	3.79	4.30	5.35	6.40	8.55				
	Min				1.61	2.11	2.62	3.12	3.64	4.15	5.15	6.18	8.25				
Perçage Recommandé	Max	0.84	1.04	1.24	1.60	2.10	2.60	3.10	3.62	4.12	5.12	6.13	8.17	10.20	12.22	14.25	16.25
	Min	0.80	1.00	1.20	1.50	1.99	2.49	2.99	3.48	3.98	4.95	5.95	7.93	9.93	11.90	13.85	15.85

Résistance au Cisaillement minimum – testé selon ISO 8749, kN																	
Acier au carbone																	
Résistance standard	0.4	0.6	0.9	1.45	2.5	3.9	5.5	7.5	9.6	15	22	39	62	89	120	160	
Haute résistance				1.9	3.5	5.5	7.6	10	13.5	20	30	53					
Acier inoxydable																	
Résistance standard				1.05	1.9	2.9	4.2		7.6	11.5	16.8	30					

Longueur																		
4																		
5																		
6																		
8																		
10																		
12																		
14																		
16																		
18																		
20																		
22																		
24																		
26																		
28																		
30																		
35																		
40																		
45																		
50																		
55																		
60																		
65																		
70																		
75																		
80																		
85																		
90																		
95																		
100																		
120																		
Tolérance sur longueur	1 – 10 mm longueur ± 0.25				12 – 50 mm longueur ± 0.50						au dessus de 50 mm longueur ± 0.75							

Coffrets d'Assortiments

* Disponible en Côtes Pouces